

# STORMBOARD™

Everything Plywood wants to be

Welcome to Storm Board, if you have not used this product before, this data sheet should guide you through our product range and answer most of your queries on how to use Storm Board. For more information call us on 01282 861325 option 1

## How is Storm Board made?




Our standard boards are made from 100% mixed waste plastic. This is usually classed as “unrecyclable” plastic and includes bottle tops, crisp packet, cosmetic packaging, food packaging, garden toys etc and means that there could be particles of wood and paper mixed in. Don't worry, the plastic is cleaned and cooked at over 200°C during processing.

STORMBOARD™



Some of our specialist boards have a virgin plastic content. For example, if you want a white or a pink board, these colours are not available in recycled material, but would be available in a 70% recycled board. The same goes for a certified fire-retardant skin.

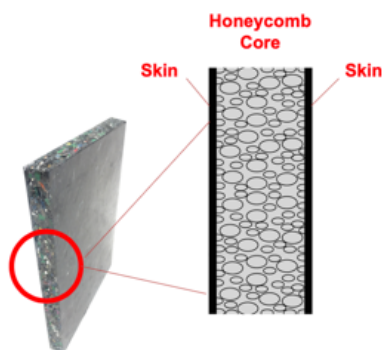

**KEDEL**  
ECO-FRIENDLY PLASTIC PRODUCTS

tel +44 (0)1282 861325 email [info@kedel.co.uk](mailto:info@kedel.co.uk) web [www.kedeltrade.co.uk](http://www.kedeltrade.co.uk)





# STORMBOARD™

Everything Plywood wants to be

## Storm Board Grades

### Storm Board HI (High Impact)

The HI board is the most utilitarian of our boards. It has a smooth PE/PP surface encapsulating the mixed plastic waste core. It's really tough, easy to clean, with good chemical resistance. It is hard for paint/graffiti to stick to it, unless a key is made by sanding. It is formable, UV stable and can be plastic welded.

### Storm Board HI FR (High Impact Fire Retardant)

The HI FR board has achieved a Class 3 rating in accordance with BS 476 part 7 "surface spread of flame." The standard colour is a speckled cream/ beige. This product is made with recycled material.

**Agri Board** – these are "B" quality/ "seconds" HI boards

#### HI Applications:

- Construction site hoardings
- Formwork
- Sheds, shelters, storage lockers
- Wet areas, such as showers and toilet cubicles
- Campsites – washing areas, recycling areas, play areas
- Gardens – raised beds, compost bins, lawn edging, furniture
- Plinths, Art installations
- Animal – husbandry, hutches, kennels
- Farming – stall lining, calf hutches, stables, slurry pits
- Warehousing – shelving, bump corners, packing tables

### Storm Board SF (Shop Fitting)

The SF board was developed to be similar to MDF for the shop fitting and furniture industry. It is very stiff, making it more brittle than the HI board, can be painted and laminated with much tighter tolerances. With the advent of self-adhesive "car wrap" material any surface look is achievable. The wraps such as Di-Noc and Coverstyl, do not require a laminating press, and can be applied to one side only. Some of these wraps have a fire rating too.

SF has a skin made from polystyrene (old coat hangers), which make it black, and if used outdoors needs a coating, as it is not UV stable.

#### SF Applications:

- Counters, furniture carcass
- Cubicles, changing rooms
- Pillar cladding
- Signage
- Shelving
- Shop window
- Office tables & desks

# KEDEL

ECO-FRIENDLY PLASTIC PRODUCTS

tel +44 (0)1282 861325 email [info@kedel.co.uk](mailto:info@kedel.co.uk) web [www.kedeltrade.co.uk](http://www.kedeltrade.co.uk)

# STORMBOARD™


Everything Plywood wants to be

## Storm Board sizes

<b>Oversize</b>	This is the standard format direct from the moulding machine (at 20 °C ambient temperature): HI 2471 x 1235 mm - SF 2506 x 1258 mm
<b>Cut-to-size</b>	2440 x 1220 x 19 mm
<b>Tolerance</b>	+/- 2mm standard or for AGRI Board +/- 5 mm
<b>Oversize benefits</b>	The skin on the side adds to the board's overall strength and protection during transport.



## Storm Board grades – AGRI is a “B” grade material

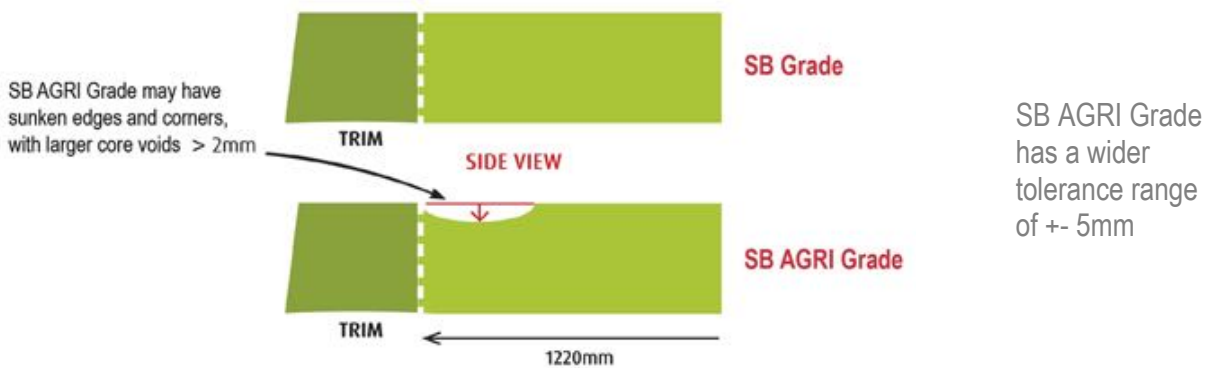

## Storm Board core

The core is a non-perfect recycled waste material, which is not compounded or prepared. Voids in the core will occur (<4 cm Ø), which helps make the panel light and stiff.





# STORMBOARD™

Everything Plywood wants to be

## Possible Agri Board surface:

Voids causing dimples in surface  
Sunken edges & corners, making these boards "B" Grade

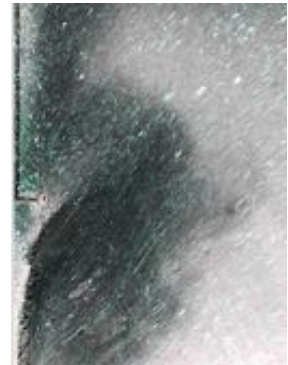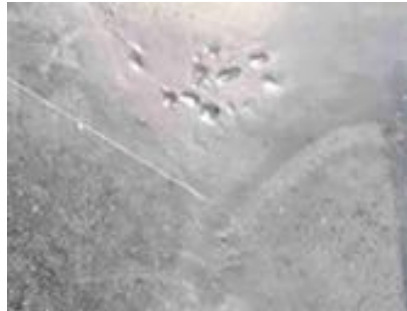


## Suitability for Use and Warranty

*Nothing herein constitutes a warranty express or implied, including any warranty of merchantability or fitness for use, nor is protection from any law or patent to be inferred. The exclusive remedy for all claims is replacement of materials. Contact the sales office for a copy of the complete Kedel Limited Terms and Conditions of Sale.*

*Information provided is for guidance only, the customer is solely responsible for making sure Storm Board is fit for purpose. All information is based on tests carried out on panels made in the UK. Using recycled mixed waste material in manufacturing will always account for variation.*

## Using P2 Storm Board

<b>Coating</b>	<p>For the rendered look, non-slip and UV protection, we recommend CorkSol coating. <a href="http://www.corksolutuk.com">www.corksolutuk.com</a> Wrap with Di-Noc or Coverstyl</p>    
----------------	--






# STORMBOARD™

Everything Plywood wants to be

<p><b>Fire Retardancy</b></p>	<p>Only the HI FR board has a Class 3 rating, (see above) to BS 476 part 7.</p> <p>The standard boards are not fire rated, however fire-retardant coatings can be applied to the surface.</p> <p>For walls – CorkSol cork coating certified to Euroclass Bs2D0 or CorkSol stone coating certified to Euroclass Bs1D0.</p> <p>We can also supply a board produced with a skin made from certified flame-retardant plastic. This material has been certified in accordance with UL94 at grade V0</p>
<p><b>Cutting</b></p>	<p>You can cut Storm Board with a hand saw, jigsaw, router, bench saw, and skill saw. We suggest running saws at slower speeds to avoid melt and with blades recommended for plastic cutting.</p>
<p><b>Drilling</b></p>	<p>Storm Board drills well with wood drill-bits and can be countersunk.</p>
<p><b>Routing/ CNC</b></p>	<p>Storm Board can be CNC routed; we suggest using tungsten carbide tooling. We have seen the best results at slow speed with 2 flute bits. CNC messages make Storm Board stand out.</p> <div data-bbox="496 1021 1430 1305"> </div>
<p><b>Gluing</b></p>	<p>Wood glues don't work. We suggest Novaseal Signfix Ultrabond adhesive or alternatively 2-part polymer glues.</p>
<p><b>Fillers</b></p>	<p>Wood filler doesn't work. We suggest Epoxy fillers.</p>
<p><b>Painting/Printing</b></p>	<p>Storm Board comes in black/dark grey speckled skin colour. We can colour the skin in manufacturing at an extra cost for large volume. As standard, HI has an anti-graffiti finish, so paint has difficulty finding purchase, but Vinyl graphics adhere well.</p> <p>It is also possible to UV print the boards, a great alternative to Aluminum composite materials on site hoardings.</p> <p>SF board is paintable and printable.</p> <div data-bbox="496 1787 1430 2029"> </div>

# STORMBOARD™

Everything Plywood wants to be

<p><b>Edge Banding</b></p>	<p>Edge banding can be applied using standard glue fixing, or mechanically by routing into the core and using a T edge. Use adhesive wraps to wrap over the edge. The current trend is to show off the recycled core leaving it exposed or painted. The edge can also be plastic welded.</p> 
<p><b>Screwing</b></p>	<p>Screws fix well in Storm Board as its elasticity means it stretches and grips the screw's thread. And expansion gap must be allowed when being used outdoors.</p>
<p><b>Nailing</b></p>	<p>As Storm Board expands and contracts, we don't recommend nails, as the only fixing method.</p>
<p><b>Welding</b></p>	<p>Storm Board HI can be plastic or vibration welded.</p> 
<p><b>Forming</b></p>	<p>Storm Board HI can be heat formed.</p> 
<p><b>Cleaning</b></p>	<p>Storm Board can be jet washed at low pressure, with min. 100 mm nozzle distance from board.</p>



# STORMBOARD™

Everything Plywood wants to be

## APPENDIX – mechanical testing

Mechanical Test results, (Swansea University)			
Property	Storm Board GF (foam and fibre core)	Storm Board HI (foam core)	Plywood (F10 / E5)
Density	695 kg/m <sup>3</sup>	589 kg/m <sup>3</sup>	500 – 600 kg/m <sup>3</sup>
Thermal conductivity	0.259 W/mK	0.193 W/mK	0.13 W/mK
Thermal expansion	128 x 10 <sup>-6</sup> /°C	151 x 10 <sup>-6</sup> /°C	5 x 10 <sup>-6</sup> /°C
Bending stiffness at 23°C	0.39 GPa	0.35 GPa	0.5 GPa
Bending stiffness at 40°C	0.28 GPa	0.2 GPa	
Bending stiffness at 60°C	0.16 GPa	0.11 GPa	
Bending stiffness after 2 weeks water immersion	0.46 GPa	0.41 GPa	0.25 – 0.35 GPa
Bending stiffness after 4 weeks UV exposure	0.45 GPa	0.37 GPa	0.4 GPa
Bending strength at 23°C	12.9 MPa	13.0 MPa	15 MPa
Bending strength at 40°C	10.8 MPa	9.7 MPa	
Bending strength at 60°C	7.7 MPa	7.7 MPa	
Bending strength after 2 weeks water immersion	14.1 MPa	14.6 MPa	~6 - 8 MPa
Bending strength after 4 weeks UV exposure	13.3 MPa	14.2 MPa	12 – 14 MPa
Compressive stiffness at 23°C	0.42 GPa	0.28 GPa	0.4 GPa
Force to buckle panel edgeways	13.5 kN	8.5 kN	12.6 kN
Force to buckle panel lengthways	1.7 kN	1.1 kN	1.6 kN